



## TOWEL RAILS

**15**  
year  
warranty

**DeLonghi**  
*Living innovation*



## LUXURY AND WARMTH

Create a safe, comfortable, healthier bathroom environment with stylish towel rails and enjoy the luxury of warm dry towels.

Complement the surroundings with your towel rail or choose to make a bold statement with one.

Keep bodies and towels warm and dry while extending the lifespan of your home's interior by reducing bathroom dampness.

*If you need confirmation of quality, every De Longhi towel rail has a 15 year guarantee against design or manufacturing defects from the date of installation.*

Towel rails available with electric element option.

finishes

High gloss white and chrome.

Straight available in **four** heights and three widths.

Curved available in four heights and two widths.

measurements

Straight & curved

For full details PTO


# DE LONGHI ELEGANCE STRAIGHT/CURVED TOWEL RAILS

TABLES BASED ON ΔT 50 - MEAN WATER TEMPERATURE IN RADIATOR OF 70°C AND A ROOM TEMPERATURE OF 20°C ΔT 60 - MEAN WATER TEMPERATURE IN RADIATOR OF 80°C AND A ROOM TEMPERATURE OF 20°C - RADIATOR OUTPUTS TO EN442

Model Straight		Width mm (L)	Height mm (H)	Connection Centres mm (I)	Output kw ΔT50		Output kw ΔT 60	
White	Chrome				White	Chrome	White	Chrome
DLWS-500x 801	DLCS-500x 801	500	801	450	0.392	0.263	0.491	0.330
DLWS-500x1252	DLCS-500x1252	500	1252	450	0.595	0.404	0.747	0.509
DLWS-500x1457	DLCS-500x1457	500	1457	450	0.691	0.466	0.867	0.588
DLWS-500x1867	DLCS-500x1867	500	1867	450	0.892	0.588	1.119	0.742
DLWS-600x 801	DLCS-600x 801	600	801	550	0.466	0.309	0.583	0.388
DLWS-600x1252	DLCS-600x1252	600	1252	550	0.702	0.477	0.881	0.601
DLWS-600x1457	DLCS-600x1457	600	1457	550	0.813	0.553	1.020	0.698
DLWS-600x1867	DLCS-600x1867	600	1867	550	1.042	0.703	1.306	0.886
DLWS-750x 801	DLCS-750x 801	750	801	700	0.577	0.379	0.722	0.475
DLWS-750x1252	DLCS-750x1252	750	1252	700	0.864	0.587	1.083	0.739
DLWS-750x1457	DLCS-750x1457	750	1457	700	0.996	0.682	1.250	0.859
DLWS-750x1867	DLCS-750x1867	750	1867	700	1.267	0.876	1.586	1.102
Model Curved		Width mm (L)	Height mm (H)	Connection Centres mm (I)	Output kw ΔT50		Output kw ΔT 60	
White	Chrome				White	Chrome	White	Chrome
DLWC-600x 801	DLCC-600x 801	600	801	550	0.466	0.309	0.583	0.388
DLWC-600x1252	DLCC-600x1252	600	1252	550	0.702	0.477	0.881	0.601
DLWC-600x1457	DLCC-600x1457	600	1457	550	0.813	0.553	1.020	0.698
DLWC-600x1867	DLCC-600x1867	600	1867	550	1.042	0.703	1.306	0.886
DLWC-750x 801	DLCC-750x 801	750	801	700	0.577	0.379	0.722	0.475
DLWC-750x1252	DLCC-750x1252	750	1252	700	0.864	0.587	1.083	0.739
DLWC-750x1457	DLCC-750x1457	750	1457	700	0.996	0.682	1.250	0.859
DLWC-750x1867	DLCC-750x1867	750	1867	700	1.267	0.876	1.586	1.102

Suggested sizes for noggins; 90x45mm framing timber installed vertically and set in 102.5mm from each outside edge of towel rail. This will ensure you have suitable fixing for brackets.  
 NB: Please allow suitable noggin for bottom centre bracket placement, place in position of choice.

NOTE: When fitting a towel rail mark position of mounting brackets which fit between the cross rails. Fit mounting brackets to wall first then fit towel rail to brackets. Following this method will automatically align top fixing brackets to towel rail.

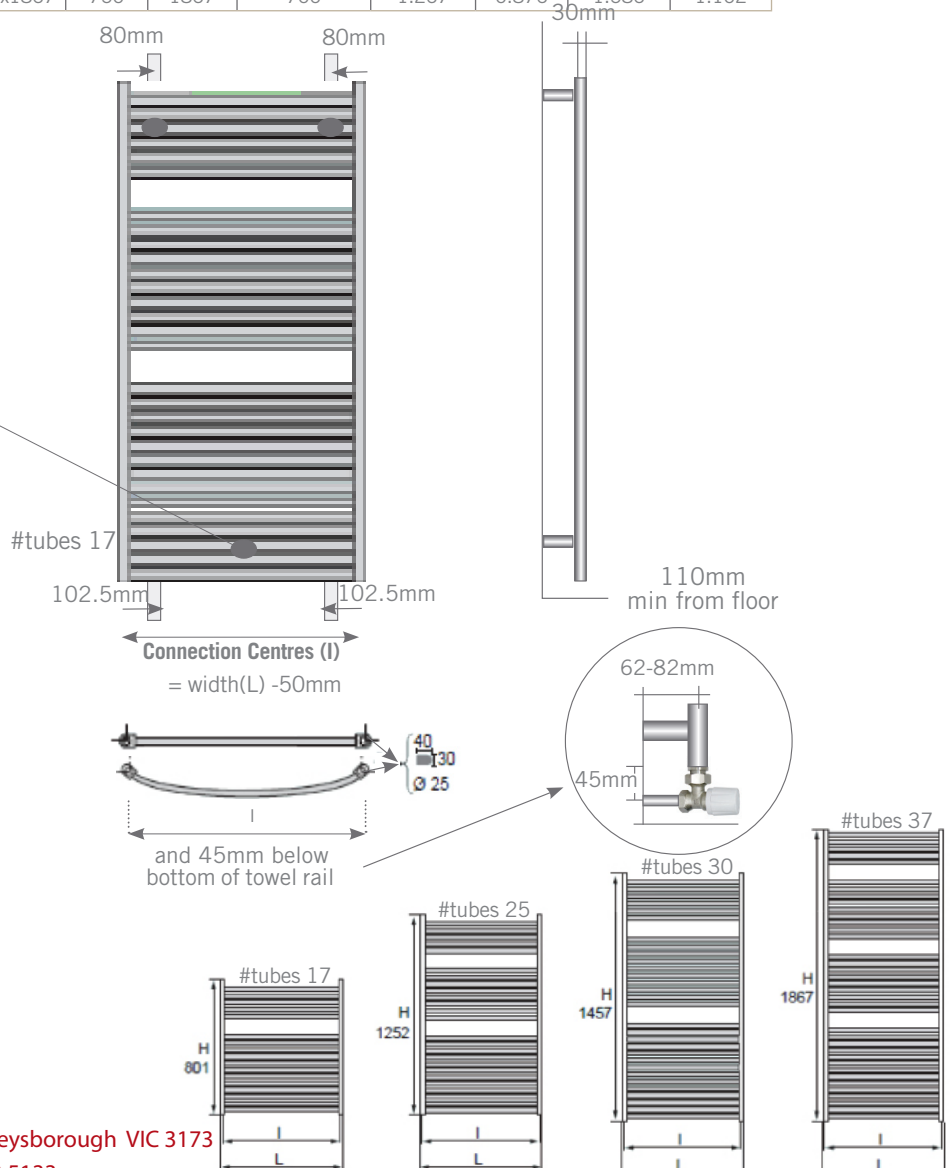

showroom 11 Fiveways Boulevard Keysborough VIC 3173  
 phone 1300 00 1800 fax (+613) 9798 5133

email enquiries@huntheat.com.au website www.huntheat.com.au